



REV	BY	DATE	ECN/ERO	DESCRIPTION
00	Terry	08/21/17	-	PRODUCTION RELEASED

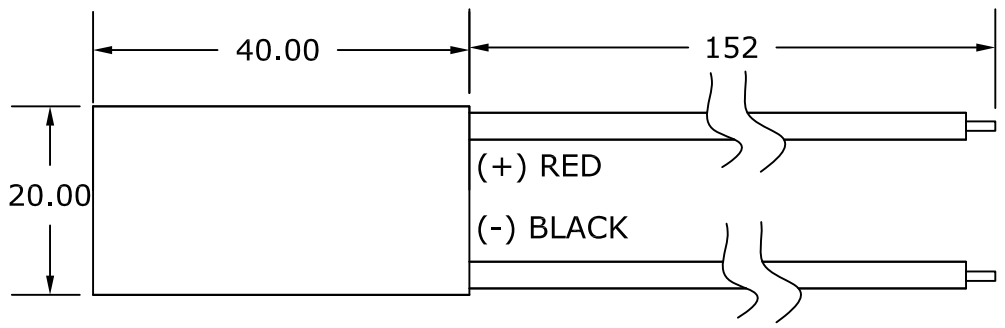

NOTES:


- ① Wire are UL1213, AWG22,19/35, PTFE.
- 2. Lapped both side, height is 3.60 ± 0.025 mm, flatness and parallel is 0.025mm.
- ③ Sealed with RTV 132.
- ④ Printing at cold side.
- ⑤ ACR: 1.120-1.244-1.369 ohms(23°C)
(N=63, G=0.103, L=12",22AWG,STRANDED)
- ⑥ Dice is 1.20*1.20*1.40mm.

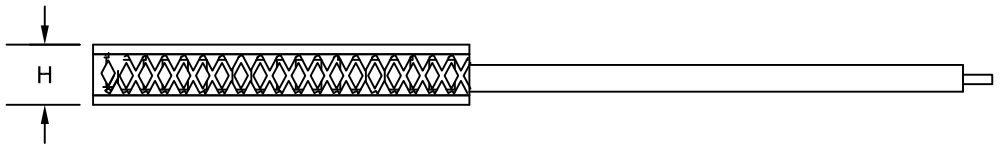

Ceramic Material: Alumina(Al_2O_3)
Solder Construction: 232°C SbSn

REFERENCE ONLY!	
Nominal Specs (@25°C)	
I_{max} (A)	5.0
U_{max} (V)	7.6
Q_{max} (W)	22.1
ΔT_{max} (°C)	67

NOTE:
ALL DIMENSIONS = mm

 <p>4707 DETROIT AVE CLEVELAND, OHIO 44102</p> <p>PH. (216) 939-2300 FAX (216) 939-2310</p>		P/N	DESCRIPTION	
		387001794	ET5,63,F1,2040,TA,RT,W6	
<p>SURFACE FINISH 3.2 $\sqrt{\mu m}$ 125 $\sqrt{\mu in}$ (UNLESS OTHERWISE SPECIFIED)</p> <p>BREAK ALL EDGES; 0.015 [0.40mm] x 45°</p>		TITLE		APPROVAL
		THERMOELECTRIC MODULE 232° SbSn CONSTRUCTION		
		DWG NO		
		387001794	00	