


| ITEM NO. | PART NUMBER | DESCRIPTION | QTY. | COMPONENT NOTES |
|----------|-------------|--|------|-----------------|
| 1 | 50-00072 | Connector, dc plug, 5.5x2.5xL23.8 mm, molding style, spring contacts, twist lock | 1 | |
| 2 | 30-00007 | Wire, 2C BC, 18 AWG, UL2468, 300V, 80C, 4.4 mm, VW-1, PVC, 87A | 1 | |
| 3 | 24-00055 | Overmold, PVC, black | 1 | |

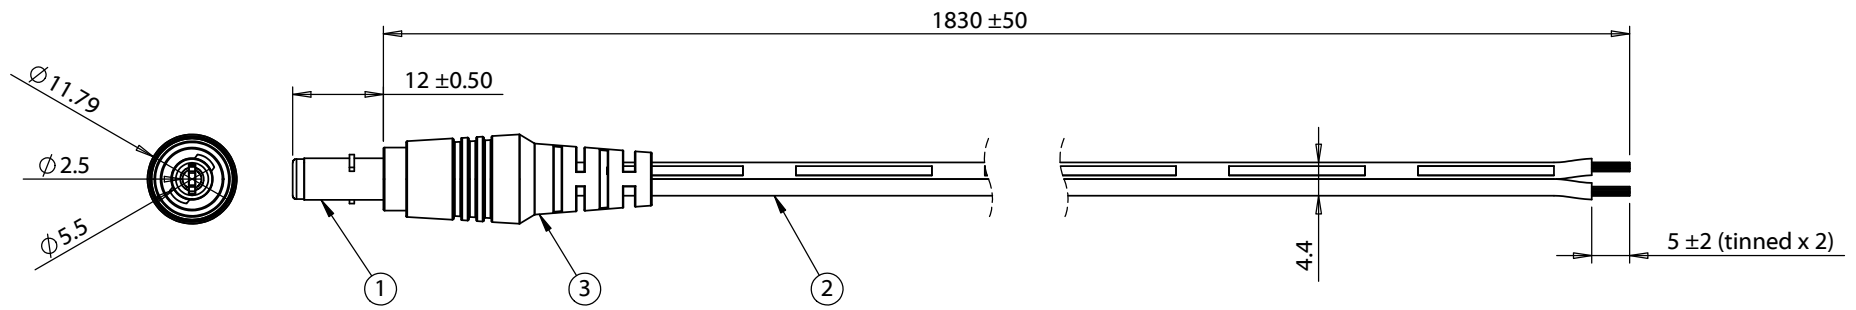

Notes:

Hi-Pot test: 600 Vac, 0.5 mA, 1 second

| Wiring Diagram | |
|----------------|-------------------|
| 50-00072 | wire color |
| center | black with stripe |
| sleeve | black |

| | | | | | |
|-----------|-----------|--|--|--|--|
| Revision: | Date: | Description: | Prepared: | Notes: | <h1>TENSILITY</h1> <p>tel 1.541.323.3228 800 877.670.7118 fax 1.541.323.4202 web tensility.com</p> |
| A | 3/29/2010 | Re-issue CUI spec as Tensility | | RoHS and REACH compliant | |
| A1 | 8/31/2011 | Updated description, connector, and wire information | Verified: | Function test: no open, no short circuit, no intermittent | |
| | | | Dimensions are in millimeters. Tolerances: X: ± 0.5 mm X.X: ± 0.3 mm X.XX: ± 0.05 mm | Description: Cable, 1830 mm, 5.5x2.5x12 mm, twist lock 50-00072 dc plug to stripped tinned, 18 AWG, 30-00007 wire | |
| Size: | | Part number: | | Scale: 1:1 | |
| A | | 053-0488R (CA-2223) | | Sheet 1 of 1 | |