


1

2

3

4

5

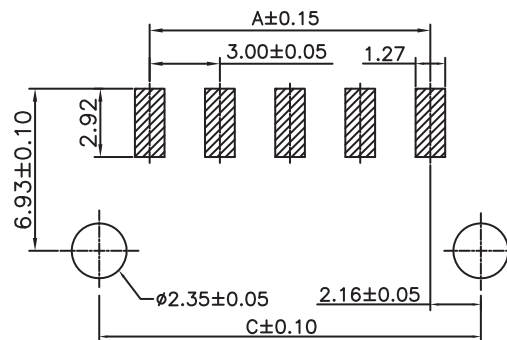

PCB LAYOUT - COMPONENT VIEW

TECHNICAL CHARACTERISTICS

MATERIAL
 INSULATOR: LCP
 FLAMABILITY RATING: UL94-V0
 COLOR: BLACK
 CONTACT MATERIAL: COPPER ALLOY
 CONTACT TYPE: STAMPED
 CONTACT PLATING: TIN
 QUALITY CLASS: 25 MATING CYCLES
 PITCH: 3.00MM

ENVIRONMENTAL
 OPERATING TEMPERATURE: -40 UP TO 105 °C
 COMPLIANCE: LEAD FREE AND ROHS



ELECTRICAL
 CURRENT RATING: 5A
 WORKING VOLTAGE: 250 VAC
 INSULATOR RESISTANCE: >1000 MOHM
 DIELECTRIC WITHSTANDING VOLTAGE: 1500 VAC/MN
 CONTACT RESISTANCE: 10 mOHM MAX

STANDARD
 CERTIFIED: E323964


SOLDERING
 JEDEC LEAD FREE REFLOW SOLDERING

PACKAGING
 TAPE AND REEL

DIMENSION
 A = 3.00 x (NB. PIN - 1)
 B = 3.00 x (NB. PIN +1) +0.65
 C = (3.00 x NB. PIN) + 1.3

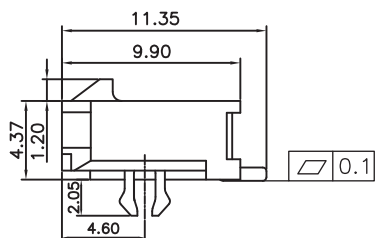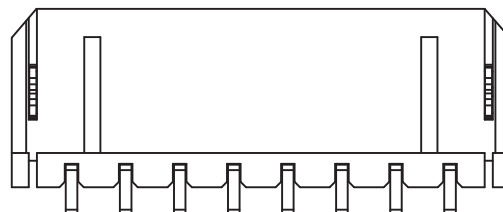

LAST CKT.

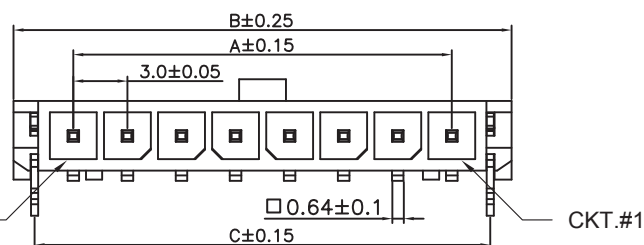

CKT.#1

RoHS Compliant

PROJECTION:



GENERAL TOLERANCE

.X = +/- 0.2

.XX = +/- 0.15



| | | | |
|-----|-----------|-------------|----|
| D | 07-MAR-16 | COPLANARITY | AK |
| C | 16-JUL-15 | PINNING | AK |
| B | 04-FEB-15 | PACKAGING | QP |
| A | 10-JUN-14 | PDF | AS |
| REV | DATE | FILE | BY |

APPROVAL: BBu

UNIT: MM

SCALE:

SHEET: 1/3


DRAW:

DESCRIPTION: 3.00 MM SMT SINGLE ROW MALE RIGHT ANGLED HEADER
 WITH THROUGH HOLE RETENTION CLIPS

WERI PART NO: 662 1xx 130 822

SIZE

A4

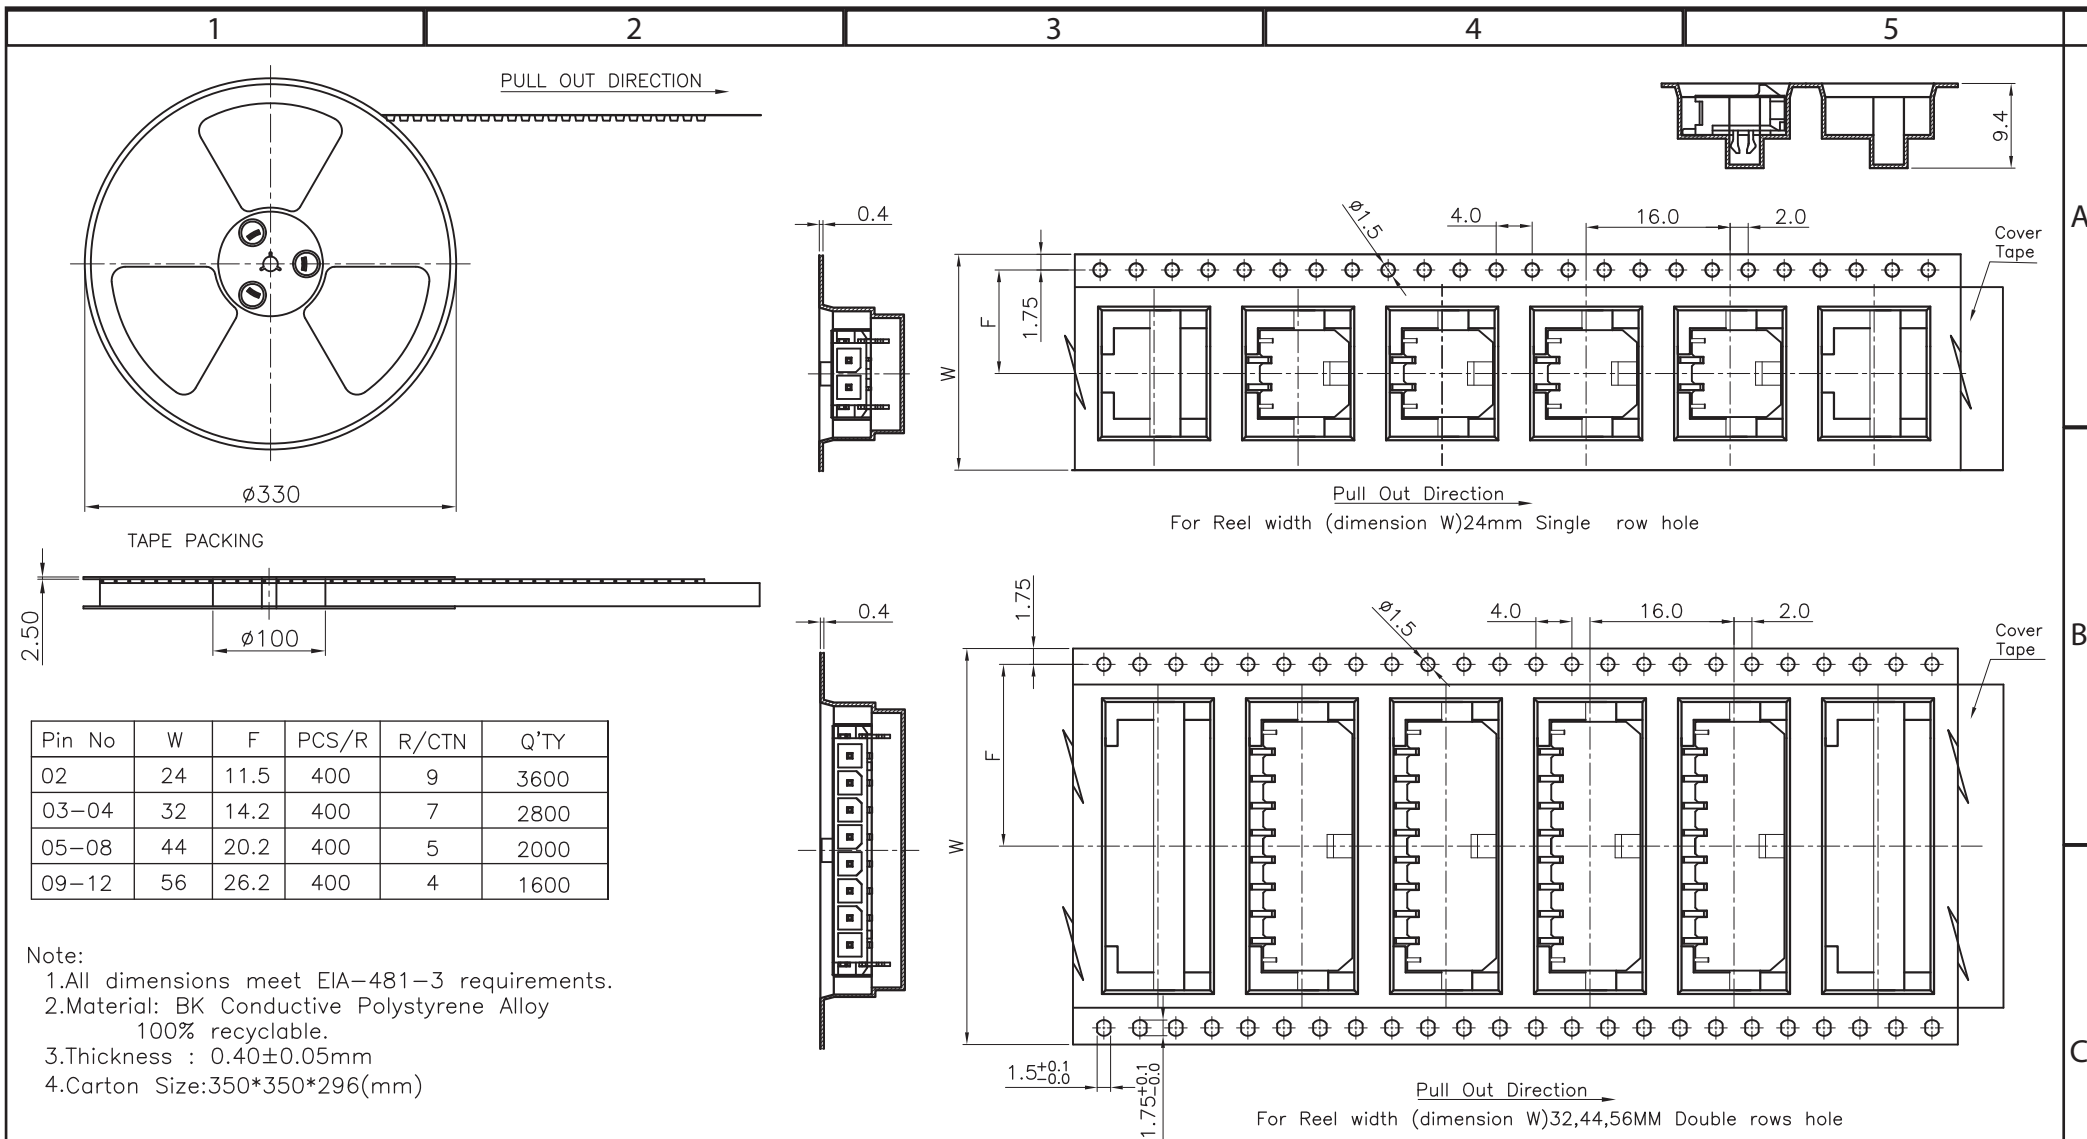

| Pin No | W | F | PCS/R | R/CTN | Q'TY |
|--------|----|------|-------|-------|------|
| 02 | 24 | 11.5 | 400 | 9 | 3600 |
| 03-04 | 32 | 14.2 | 400 | 7 | 2800 |
| 05-08 | 44 | 20.2 | 400 | 5 | 2000 |
| 09-12 | 56 | 26.2 | 400 | 4 | 1600 |

- Note:
- All dimensions meet EIA-481-3 requirements.
 - Material: BK Conductive Polystyrene Alloy
100% recyclable.
 - Thickness : 0.40 ± 0.05 mm
 - Carton Size: 350*350*296(mm)

| RoHS Compliant | | | | PROJECTION: | GENERAL TOLERANCE | | DESCRIPTION: 3.00 MM SMT SINGLE ROW MALE RIGHT ANGLED HEADER WITH THROUGH HOLE RETENTION CLIPS WERI PART NO: 662 1xx 130 822 | SIZE A4 |
|----------------|-----------|------|----|---------------|------------------------------------|---|---|-------------------|
| | | | | | .X = ± 0.2 .XX = ± 0.15 | | | |
| | | | | APPROVAL: BBu | UNIT: MM | DESCRIPTION: 3.00 MM SMT SINGLE ROW MALE RIGHT ANGLED HEADER WITH THROUGH HOLE RETENTION CLIPS WERI PART NO: 662 1xx 130 822 | | A4 |
| A | 04-FEB-15 | PDF | QP | | SCALE: | | | |
| REV | DATE | FILE | BY | | SHEET: 2/3 | | | |
| | | | | | DRAW: | | | |

1

2

3

4

5

Cautions and Warnings:

This electronic component is designed and developed with the intention for use in general electronics equipments.

Before incorporating the components into any equipments in the field such as aerospace, aviation, nuclear control, submarine, transportation, (automotive control, train control, ship control), transportation signal, disaster prevention, medical, public information network etc. where higher safety and reliability are especially required or if there is possibility of direct damage or injury to human body, Würth Elektronik must be asked for a written approval.

In addition, even electronic component in general electronic equipments, when used in electrical circuits that require high safety, reliability functions or performance, the sufficient reliability evaluation-check for the safety must be performed before by the user before usage.

A

B

C

RoHS Compliant

| | | | | | | | |
|-----|-----------|------|----|--|---|---|-------------------|
| G | | | | PROJECTION:  | GENERAL TOLERANCE .X = +/- 0.2 .XX = +/- 0.15 |  | |
| F | | | | | | | |
| E | | | | | | | |
| D | | | | | | | |
| C | | | | APPROVAL: JC | UNIT: MM | DESCRIPTION: DISCLAIMER | SIZE A4 |
| B | | | | | SCALE: | | |
| A | 10-SEP-14 | PDF | QL | | SHEET: 3/3 | WERI PART NO: DISCLAIMER | |
| REV | DATE | FILE | BY | | DRAW: QL | | |

D