
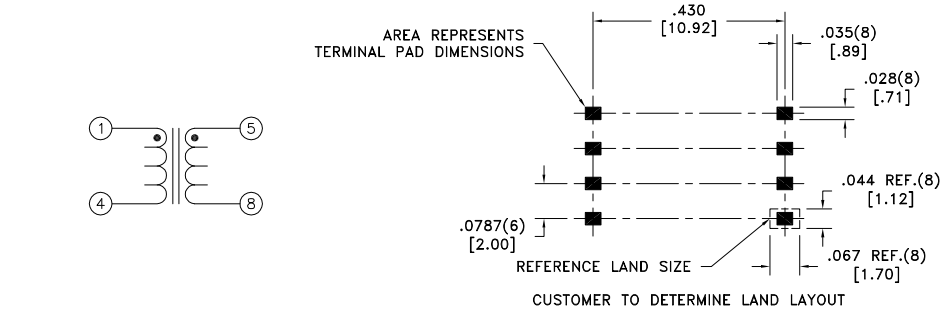


|                   |      |               |
|-------------------|------|---------------|
| CUSTOMER TERMINAL | RoHS | LEAD(Pb)-FREE |
| Sn96%, Ag4%       | Yes  | Yes           |

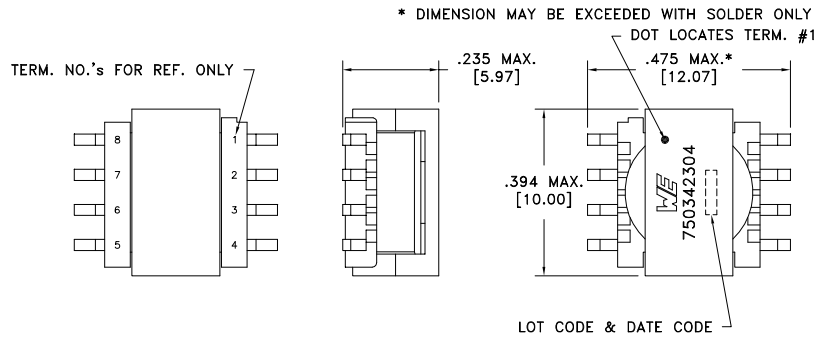

ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:

| PARAMETER          | TEST CONDITIONS                  | VALUE           |
|--------------------|----------------------------------|-----------------|
| D.C. RESISTANCE    | 1-4 @20°C                        | 0.560 ohms max. |
| D.C. RESISTANCE    | 8-5 @20°C                        | 0.560 ohms max. |
| INDUCTANCE         | 4-1 50kHz, 10mVAC, Ls            | 260uH ±15%      |
| LEAKAGE INDUCTANCE | 4-1 tie(5+8), 100kHz, 10mVAC, Ls | 8uH max.        |
| DIELECTRIC         | 4-8 1750VAC, 1 second            | -               |
| TURNS RATIO        | (4-1):(8-5)                      | 1:1, ±2%        |

GENERAL SPECIFICATIONS:

OPERATING TEMPERATURE RANGE: -40°C to +125°C including temp rise.

Wire insulation & RoHS status not affected by wire color.  
Wire insulation color may vary depending on availability.

|      |      |  |                      |  |                                     |                              |
|------|------|--|----------------------|--|-------------------------------------|------------------------------|
| REV. | DATE | Packaging Specifications<br>Method: <b>Tape &amp; Reel</b><br>PKG-0193<br>www.we-online.com/midcom |                      | Tolerances unless otherwise specified:<br>Angles: ±1°<br>Fractions: ±1/64<br>Decimals: ±.005 [.13]<br>Footprint: ±.005 [.13] | DRAWING TITLE<br><b>TRANSFORMER</b> | PART NO.<br><b>750342304</b> |
| 6A   | 8/14 | SEE REVISION SHEET FOR REVISION LEVEL  | CONVENTION PLACEMENT | This drawing is dual dimensioned. Dimensions in brackets are in millimeters.   | eiSos p/n: 750342304                | SPECIFICATION SHEET 1 OF 1   |