




Bottom view


Recommended land pattern

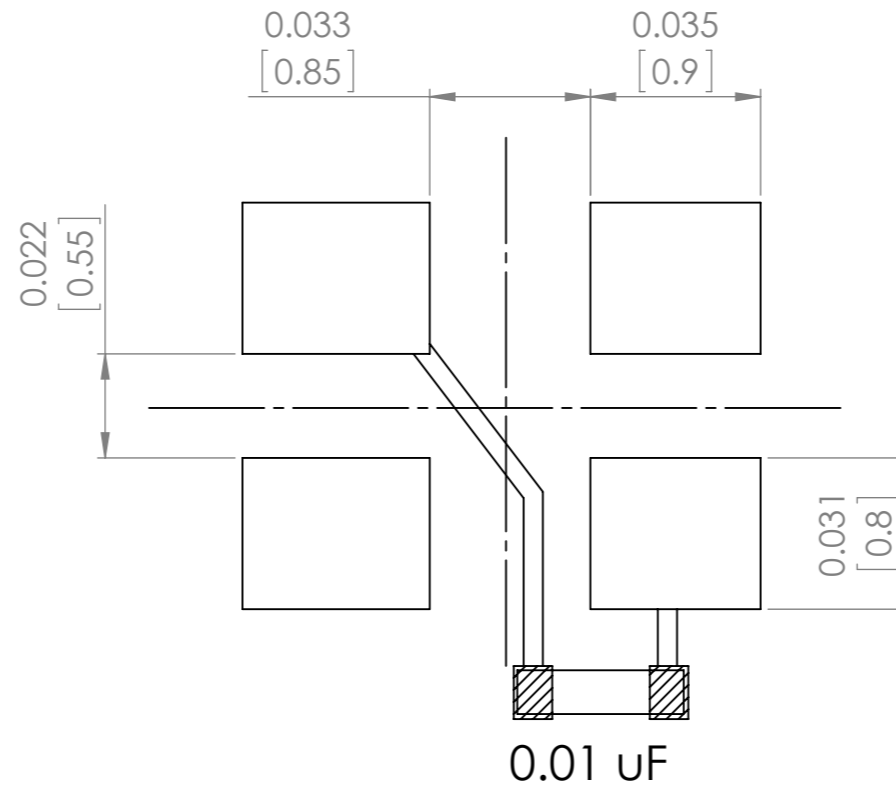

PIN	FUNCTION
1	Tri-state (Stand-by)
2	GND/case
3	Output
4	V _{dd}

Note1: Recommended using approximately 0.01uF bypass capacitor between PIN 2 and 4.

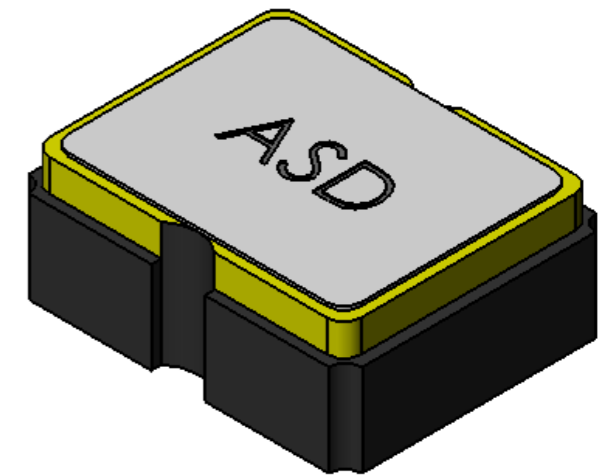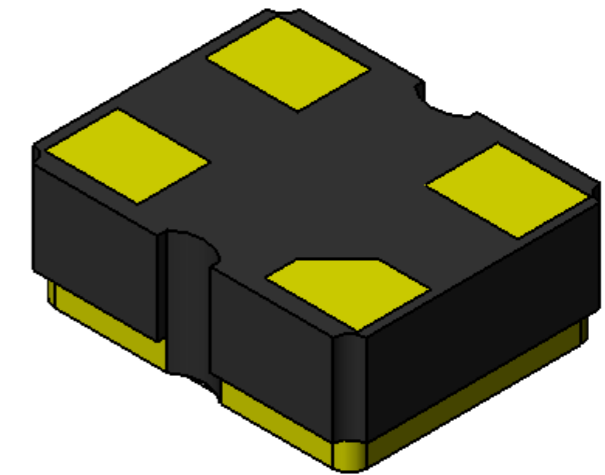

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCH(MM) SURFACE FINISH: TOLERANCES: LINEAR: ANGULAR:				FINISH:		DEBUR AND BREAK SHARP EDGES		DO NOT SCALE DRAWING		REVISION -	
DRAWN SAAZVAT				SIGNATURE		DATE		 ABRACON CORPORATION 30332 Esperanza, Rancho Santa margarita, California 92688 TITLE: LOW VOLTAGE HCMOS SURFACE-MOUNT CRYSTAL CLOCK OSCILLATOR DWG NO. ASD A3 SCALE:25:1 SHEET 1 OF 1			
CHK'D XXXXXX											
APPV'D											
MFG											
Q.A											
				MATERIAL:							
				WEIGHT:							