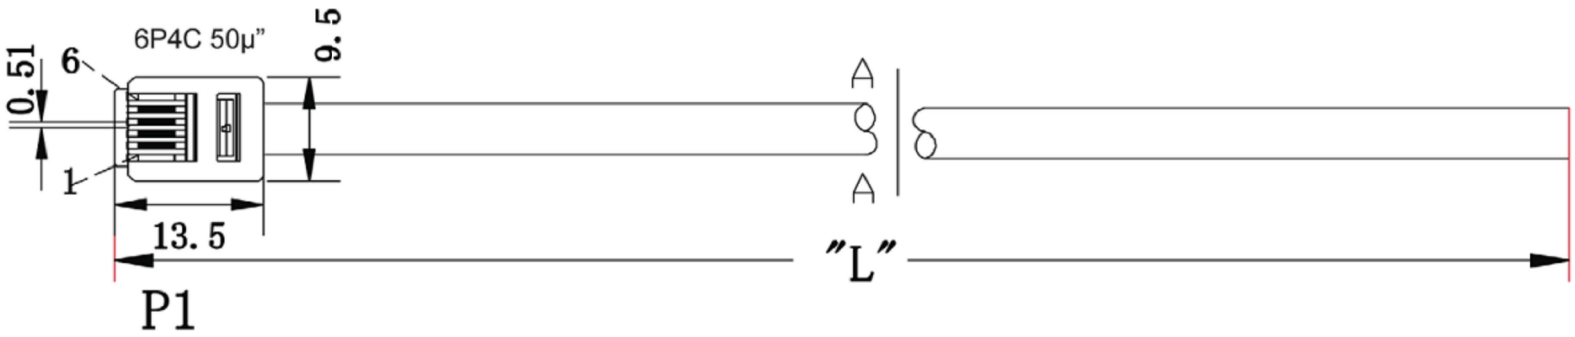

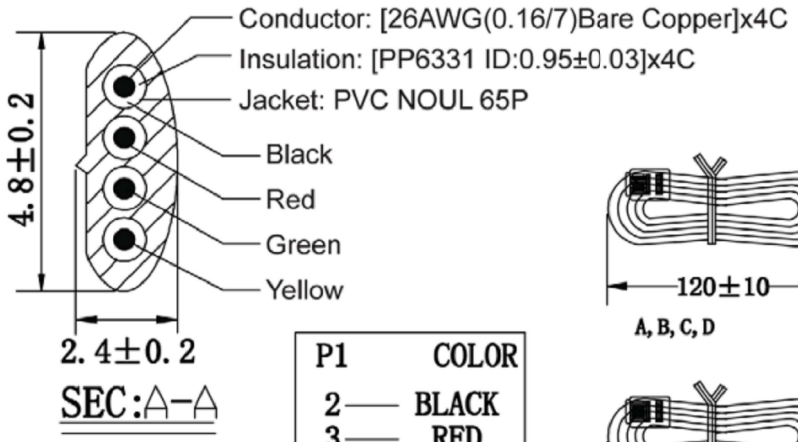

Note:

- Material: Housing-polycarbonate, clear
Terminal-0.36[.014] thick phosphor bronze.
Thick gold in localized gold plate.
Area, Gold Flash over the remainder.
Over 2.54mm[.000100] thick nickel underplate.

① Operation temperature: -20° ~ +60°C
Voltage rating: 150V
Current rating: 1A max.

Part Number	wire length	cut length
AT-S-26-6/4/X-5-OE	1525±20(5ft)	1525-1535mm
AT-S-26-6/4/X-7-OE	2135±30(7ft)	2135-2145mm
AT-S-26-6/4/X-10-OE	3050±60(10ft)	3050-3060mm
AT-S-26-6/4/X-12-OE	3660±60(12ft)	3660-3670mm
AT-S-26-6/4/X-14-OE	4270±60(14ft)	4270-4280mm
AT-S-26-6/4/X-25-OE	7625±100(25ft)	7625-7635mm
AT-S-26-6/4/X-50-OE	15250±150(50ft)	15250-15260mm

AT-S-26-6/4/X-XX-OE
B:black,S:silver,W:white — length in feet

RoHS compliant
Unit: mm

Scale	Free
TOLERANCE	
DIM	TOL
Angle	TOL

Id.	Modification	Date	Name
①	Add operation temperature	06.04.2017	Amy
⓪	Drawn	28.06.2013	Wilson

	Date	Name
Drawn	28.06.2013	Wilson
Approved	06.04.2017	Amy

ASSMANN wsw components

Customer-No.

ASSMANN WSW-No.
AT-S-26-6/4/X-XX-OE

Drawing-No.
ASS 7953 CA

rev01

Replace

Sheet