

7

6

5


4

3

2

1

REVISIONS				
EC NO	DATE	REV	DESCRIPTION	CHANGER
	13.07.26	A	INITIAL RELEASE.	Andrew

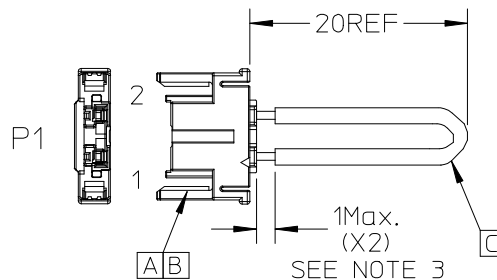

NOTES

1. THIS PRODUCT MUST MEET EU 2002/95 EC ROHS COMPLIANCE.
2. ELECTRICAL PERFORMANCE REFER TO ES-000.
3. THE INNER INSULATION EXPOSED LENGTH.
4. STICK UL LABEL ON THE OUTSIDE CARTON.

C	WIRE UL11047 24AWG DOUBLE INSULATION WHITE	A/R	
B	TERMINAL 24AWG		2
A	HSG 2CKT WHITE		1
ITEM	DESCRIPTION	L(MM)	Q'TY

WIRING CHART		
P1	P1	WIRE COLOR
1	2	WHITE

EC NO: CPG2014-0268 DRWN: JXIA004 CHKD: YXZOU APPR: FNIE	2013/07/27 2013/07/27 2013/07/29	DESCRIPTION QUALITY SYMBOLS $\nabla_F=0$ $\nabla_E=0$ $\nabla_P=0$	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE ---	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION
				mm	INCH	DRAWN BY JXIA004	DATE 2013/07/27	TITLE FLEXIMATE WIRE LOOP	
			4 PLACES	\pm ---	\pm ---	CHECKED BY YXZOU	DATE 2013/07/27	molex DOCUMENT NO. SD-68801-106 SHEET NO. 1 OF 1	
			3 PLACES	\pm ---	\pm ---	APPROVED BY FNIE	DATE 2013/07/29		
			2 PLACES	\pm ---	\pm ---	MATERIAL NO. 688014596			
			1 PLACE	\pm ---	\pm ---	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			
			0 PLACE	\pm ---	\pm ---	SIZE A 4	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		
A	REV								

6

5

4

3

2

1